

BULLETIN NO. 22/23-007
TO: ALL ISR SNOCROSS Affiliates


DATE: 18 JAN 23

SUBJECT: Clarification: The fastener/nut used to fasten the stud to the backing plate

Page | 19

6. Backing plates must be fastened to the track with a stud or a stud/nut assembly. No sharpening (vertically or horizontally, or obliquely) of the backing plate.

Clarification: The fastener/nut used to fasten the stud to the backing plate may be no more than .750 (3/4") in height from contact surface to backing plate to top of nut/fastener. Nut/fastener may not be larger in overall dimension than .5625 (9/16) actual width. The top of the nut/fastener must have a radius of no less than .125 (1/8"). Fastener may be 6 point, or 12 point, or Torx style. (Other type of fasteners must be submitted for review before use) The nut/fastener may not be used as stud reinforcement beyond the .750 height dimension. Chisel style nuts used in other disciplines are not legal for use in Snow Cross application.

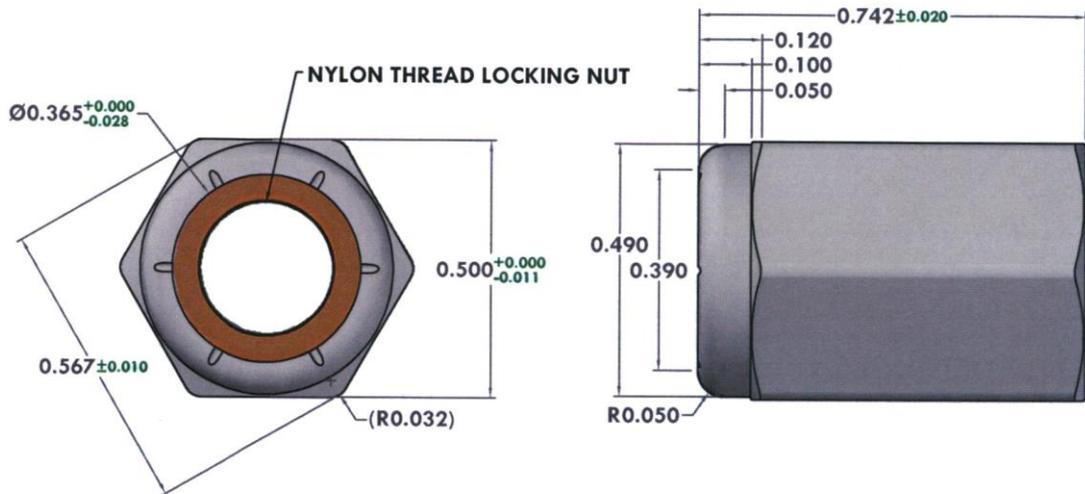

International Snowmobile Racing, Inc.